ULLTRALight

PLANIT DESIGN

Linear LED Aluminium Profile System

Ideal for creating professional looking, spot free linear lighting effects

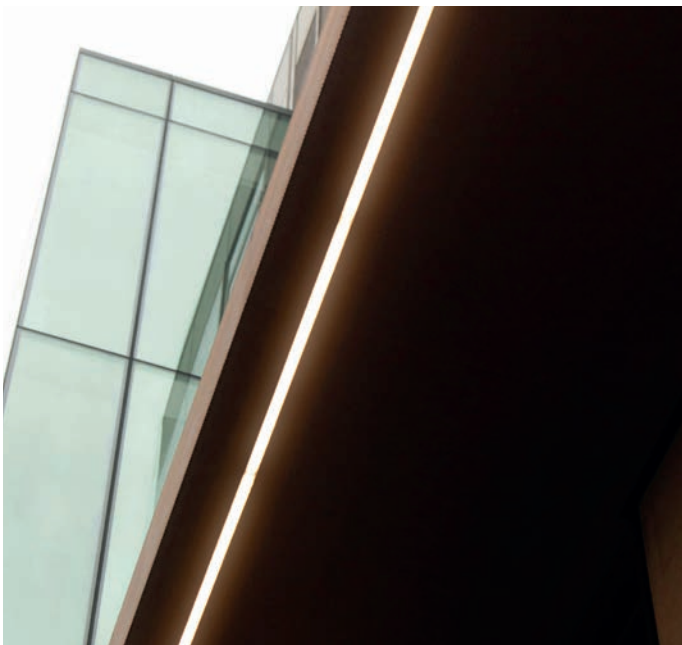

EXLP02 - Linear Profile 17x15 Non Lip with Opal Diffuser

Standard Length:	2m
Body:	Satin Anodised Aluminium
Diffuser:	PMMA Opal Matte (Acrylic UV-Resistant)
End Cap:	ABS
Mounting Bracket:	Poly Carb

SKUs (Order Code)

Extrusion	End Cap	Mounting Bracket
EXLP02 with diffuser	ECLP02	FBLP02



End Cap & Mounting Bracket (Optional)

ECLP02
End Cap



FBLP02
Mounting Bracket

Product Photos

1. EXLP02 with LED strip installed (LED strip needs to be purchased seperately)
2. EXLP02 with Mounting Bracket installed (back view)
3. EXLP02 with Mounting Bracket installed (front view)

INSTALLATION GUIDE

A **Clip Mount -** Fix the mounting bracket then clip the extrusion onto the mounting bracket

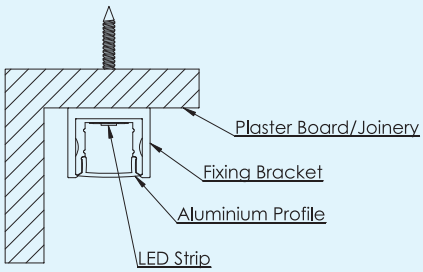



B **Surface Mount -** Mount by drilling hole through the extrusion and fixing directly onto the wall

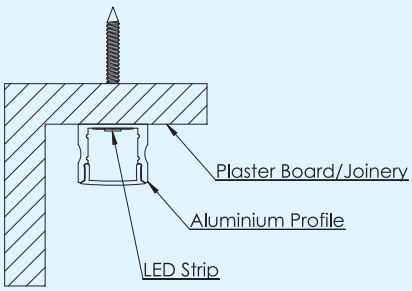

C **Recess Mount -** Mount by drilling hole through the extrusion and fixing directly onto the pre-made channel

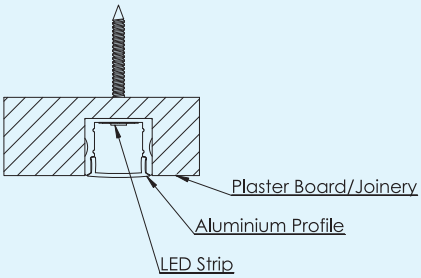



EXLP03 - Linear Profile 17x9 Non Lip with Opal or Black Diffuser

Standard Length:	2m and 4m
Body:	2m or 4m Satin Anodised 2m Black Anodised only
Diffuser:	PMMA Opal Matte (Acrylic UV-Resistant) PMMA Black (Acrylic UV-Resistant)
End Cap:	ABS
Mounting Bracket:	Poly Carb

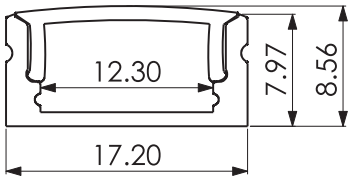

SKUs (Order Code)

Extrusion	End Cap	Mounting Bracket
EXLP03	ECLP03	FBLP03
	ECLP03-B (Black)	

End Cap & Mounting Bracket (Optional)

ECLP03
End Cap

FBLP03
Mounting Bracket

Product Photos

2



3

1. EXLP03 with LED strip installed (LED strip needs to be purchased seperately)
2. EXLP03 with Mounting Bracket installed (back view)
3. EXLP03 with Mounting Bracket installed (front view)

INSTALLATION GUIDE

A **Clip Mount -** Fix the mounting bracket then clip the extrusion onto the mounting bracket

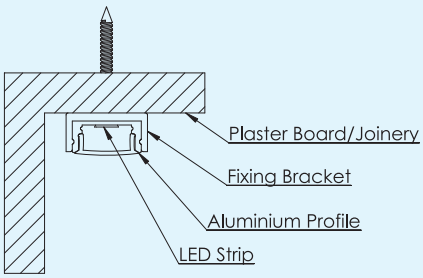

B **Surface Mount -** Mount by drilling hole through the extrusion and fixing directly onto the wall

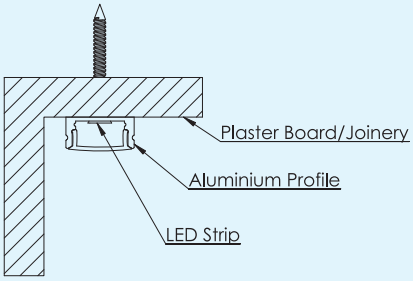

C **Recess Mount -** Mount by drilling hole through the extrusion and fixing directly onto the pre-made channel

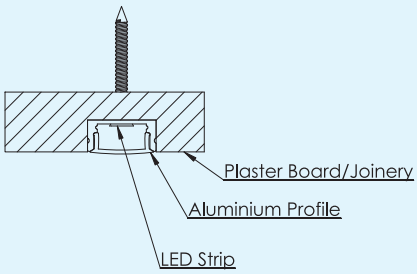



EXCR01 - Corner Profile Radius 16x16 with Opal or Black Diffuser

Standard Length:	2m
Body:	Satin Anodised or Black Anodised
Diffuser:	PMMA Opal Matte (Acrylic UV-Resistant) PMMA Black (Acrylic UV-Resistant)
End Cap:	ABS
Mounting Bracket:	Poly Carb

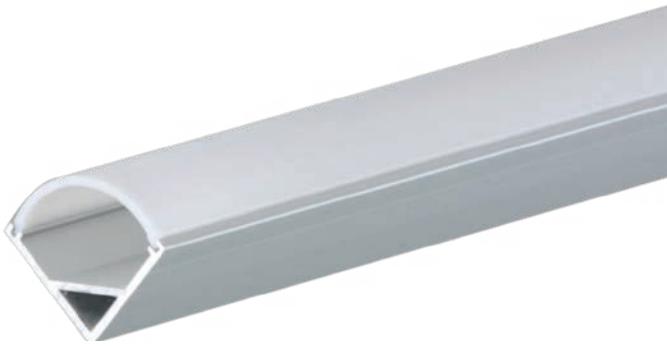



SKUs (Order Code)

Extrusion	End Cap	Mounting Bracket
EXCR01	ECCR01 ECCR01-B (Black)	FBCR01

End Cap & Mounting Bracket (Optional)

ECCR01
End Cap



FBCR01
Mounting Bracket

Product Photos



1. EXCR01 with LED strip installed (LED strip needs to be purchased seperately)
2. EXCR01 with Mounting Bracket installed (back view)
3. EXCR01 with Mounting Bracket installed (front view)

INSTALLATION GUIDE

A **Clip Mount -** Fix the mounting bracket then clip the extrusion onto the mounting bracket

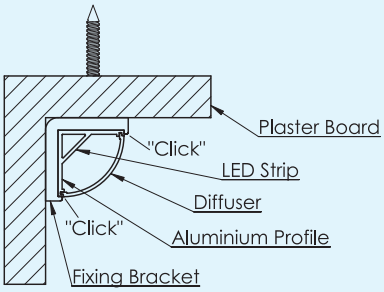

B **Surface Mount -** Mount by drilling hole through the extrusion and fixing directly onto the wall

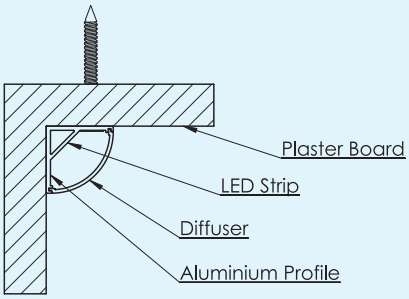

EXCR02 - Corner Profile Square 16x16 with Opal Diffuser

Standard Length:	2m
Body:	Satin Anodised Aluminium
Diffuser:	PMMA Opal Matte (Acrylic UV-Resistant)
End Cap:	ABS
Mounting Bracket:	Poly Carb

SKUs (Order Code)

Extrusion	End Cap	Mounting Bracket
EXCR02	ECCR02	FBCR02



End Cap & Mounting Bracket (Optional)

ECCR02
End Cap



FBCR02
Mounting Bracket

Product Photos





1. EXCR02 with LED strip installed (LED strip needs to be purchased seperately)
2. EXCR02 with Mounting Bracket installed (back view)
3. EXCR02 with Mounting Bracket installed (front view)

INSTALLATION GUIDE

A **Clip Mount -** Fix the mounting bracket then clip the extrusion onto the mounting bracket

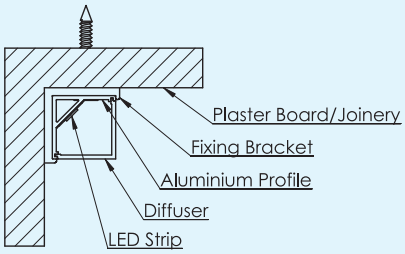

B **Surface Mount -** Mount by drilling hole through the extrusion and fixing directly onto the wall

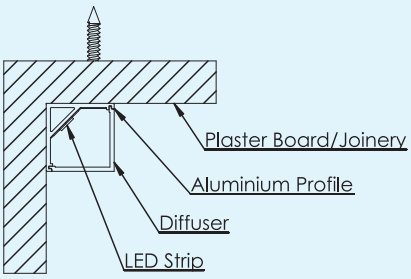



EXRS01 - Recessed Profile 17 x 15 with Lip and Opal Diffuser

Standard Length:	2m
Body:	Satin Anodised Aluminium
Diffuser:	PMMA Opal Matte (Acrylic UV-Resistant)
End Cap:	ABS
Mounting Bracket:	Poly Carb

SKUs (Order Code)

Extrusion	End Cap
EXRS01	ECRS01



End Cap & Mounting Bracket (Optional)

ECRS01
End Cap

Product Photos

1. EXRS01 with LED strip installed (LED strip needs to be purchased seperately)

INSTALLATION GUIDE

Recess Mount - Mount by drilling hole through the extrusion and fixing directly onto the wall

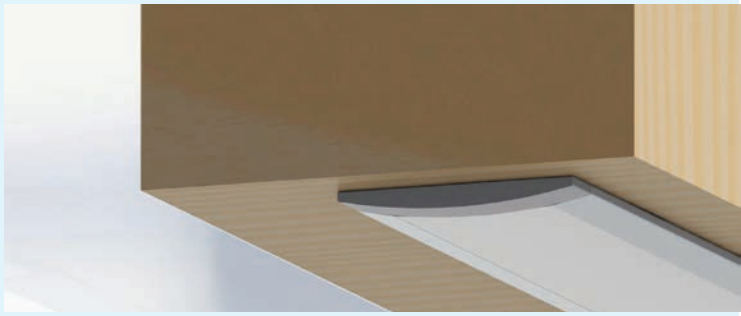

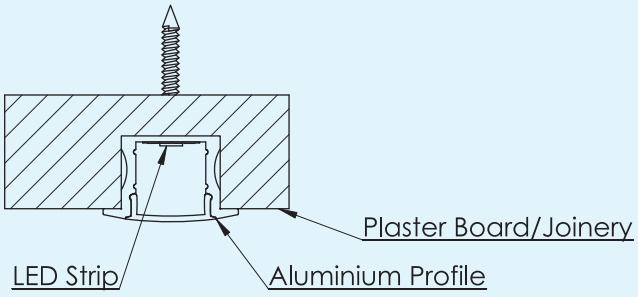

EXRS03 - Recessed Profile 17 x 9 with Lip and Opal Diffuser

Standard Length:	2m
Body:	Satin Anodised Aluminium
Diffuser:	PMMA Opal Matte (Acrylic UV-Resistant)
End Cap:	ABS
Mounting Bracket:	Poly Carb



SKUs (Order Code)

Extrusion	End Cap
EXRS03	ECRS03

End Cap & Mounting Bracket (Optional)

ECRS03
End Cap

Product Photos

1. EXRS03 with LED strip installed (LED strip needs to be purchased seperately)

INSTALLATION GUIDE

Recess Mount - Mount by drilling hole through the extrusion and fixing directly onto the wall

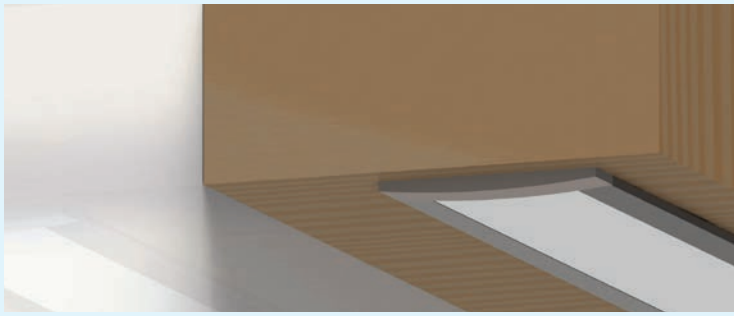

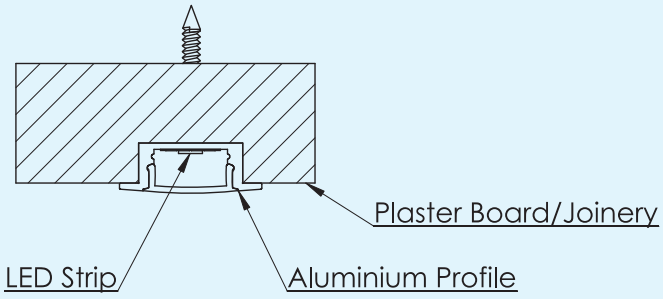

OA-64-MF - 13mm Recessed Led Gib Profile

Standard Length:	2m or 4m
Body:	Mill Aluminium
Diffuser:	2/4m PMMA Opal Matte (Acrylic UV-Resistant)
	50m Roll PC Opal Matte

SKUs (Order Code)

Extrusion	Diffuser
OA-64-MF-4.0	EXLP-DF-4.0
OA-64-MF-2.0	EXLP-DF-2.0
	EXLP-DF-ROLL

The aluminium extrusion system is designed specifically for **13mm GIB plasterboard.**

Proudly made in New Zealand, this premium profile delivers a clean, minimalist finish that blends perfectly into residential, commercial, and retail environments.

ALUMINIUM EXTRUSION

- Designed for 13mm GIB ceilings
- 20mm flanges punched to allow screws, staples or nails
- Manufactured from high-quality aluminium extrusion

Code **OA-64-MF-4.0** (4.0m lengths)

Code **OA-64-MF-2.0** (2.0m lengths)

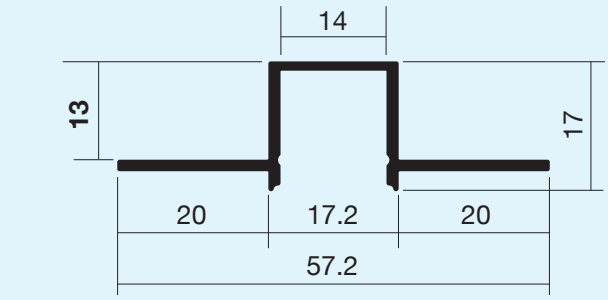



DIFFUSER

- PMMA Opal Matte

Code **EXLP-DF-4.0** (4.0m lengths)

Code **EXLP-DF-2.0** (2.0m lengths)

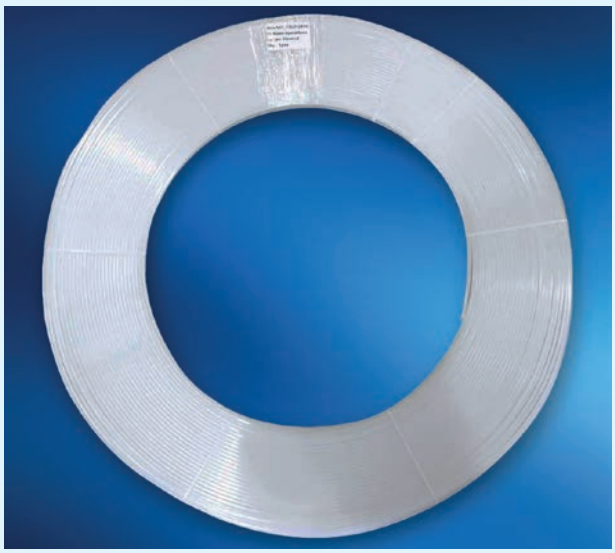

DIFFUSER ROLL

- PC Opal
- Perfect for creating smooth, even light diffusion with reduced LED light leakgage.

Code **EXLP-DF-ROLL** (50m roll)

ULLTRA Light

Lighting Component Spec Sheet – Series 4000

The 4000 Series is supplied in 4.0 metre lengths and includes both the aluminium extrusion and compatible diffusers. The extrusion is available in either mill finish or satin anodised.

Code OA-57 extrusion is designed for installation via screw fixing or double-sided tape only. It is compatible with diffusers OPE-29 and OPE-30. Please note that end caps cannot be fitted to this profile; the use of a suitable sealant is recommended.

Code OA-59 extrusion is designed for installation using mounting clips (Code OF-9). It is also compatible with diffusers OPE-29 and OPE-30. With this profile, end caps can be supplied and fitted to both flat and radius diffuser options.

DESIGNER SPEC'S



Extrusion OA-57
Diffuser OPE-29
Opal or Clear



Extrusion OA-59
Diffuser OPE-29
Opal or Clear



Extrusion OA-59
Diffuser OPE-30
Opal or Clear



Extrusion OA-57
Diffuser OPE-30
Opal or Clear

Aluminium Extrusion



Code OA-57
Description Light Profile - For LED Strip Lighting Fitting to MDF with out mounting clips
Length 4.0m
Colour Mill Finish, Satin Anodised.

Aluminium Extrusion



Code OA-59
Description Light Profile - For LED Strip Lighting Fitting to MDF with mounting clips OF-9
Length 4.0m
Colour Mill Finish, Satin Anodised

Retaining Clip



Code OF-9
Description Stainless Steel Mounting clips for LED light extrusion OA-59

Diffuser - Flat

Code OPE-29
Description Clear and Opal PMMA (Acrylic UV-Resistant)
Length 4.0m

Diffuser - Radius



Code OPE-30
Description Clear and Opal PMMA (Acrylic UV-Resistant)
Length 4.0m

Square end cap



Code OPC-29
Description Square end cap to fit extrusionOA-59 and diffuser OPE-29, Material ABS
Colour White, Grey, Black

Radius end cap



Code OPC-30
Description Square end cap to fit extrusion OA-59 and diffuser OPE-29, Material ABS
Colour White, Grey, Black

www.planitdesign.co.nz

AVAILABLE FROM